



# Martini dECO SCREENS

---

Interior decorative acoustic screens

---



CSR

## dECO Screens

dECO Screens provide a decorative room divider or wall feature that also reduces and control reverberated echo noise within interior spaces.

- Unique designs for bespoke design effects.
- Available in 22 colours in the dECO Felt colour range with a choice of black or white core.
- Patented snap-in screen technology makes installation quick and easy.
- Installed on the VERTO™ hanging channel system direct fix, suspended and suspended under tension.

## Applications

dECO Screens are designed as vertical hanging decorative acoustic room divider and wall features. For interior use only. Not suitable for external use.

## Installation

For product installation instructions, please refer to the CSR Martini installation guides available at [csmartini.com.au](http://csmartini.com.au)

## Environmental Benefits and Credentials


Manufactured from thermally bonded polyester fibre with up to 15-62% recycled fibre content. 15-20% from post-consumer PET packaging such as empty drink bottles and 0-47% post-industrial and pre-consumer PET.

- Global GreenTag certified GreenRate Level A
- Environmental Product Declaration (EPD) Certified in accordance with ISO 14025
- Global GreenTag Platinum HealthRate
- Declare Transparency Label
- Suitable for Green Star™ projects
- LBC Red List Free
- No ozone-depleting gases are used during the manufacturing process
- Safe, non-irritant, non-toxic, and non-allergenic
- Products are 100% recyclable
- High reuse potential




Martini's Product Stewardship Program can be viewed at [www.csmartini.com.au](http://www.csmartini.com.au)


## Designs

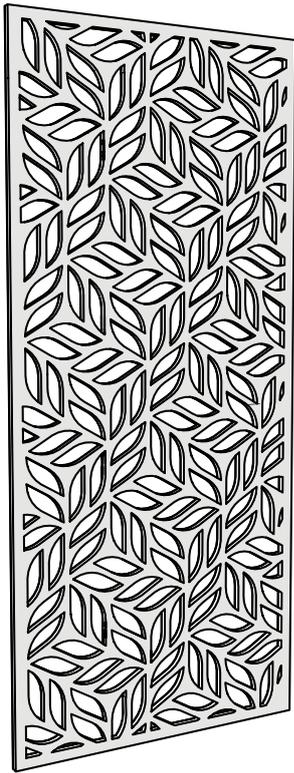


**dECO Screens Leaf**  
Thickness: 27mm  
Height: 2400mm or 2700mm

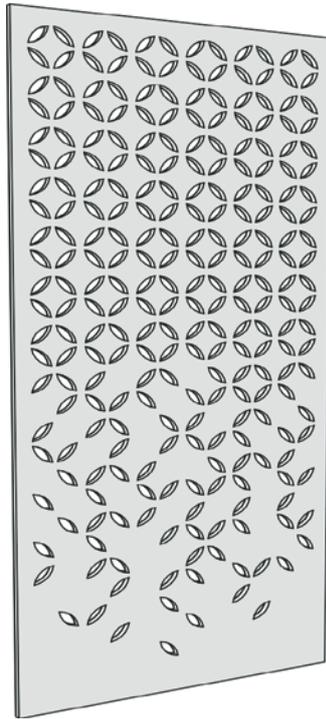


**dECO Screens Breeze**  
Thickness: 27mm  
Height: 2400mm or 2700mm

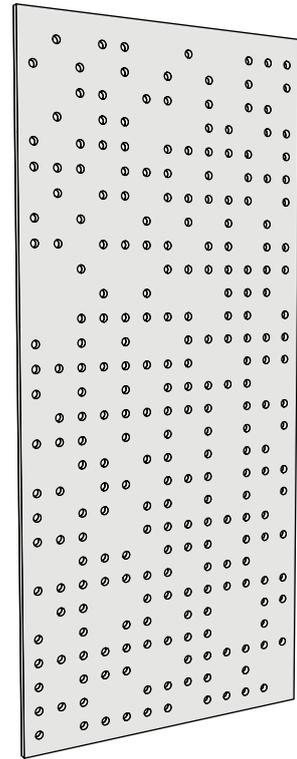

**dECO Screens Dots**  
Thickness: 27mm  
Height: 2400mm or 2700mm







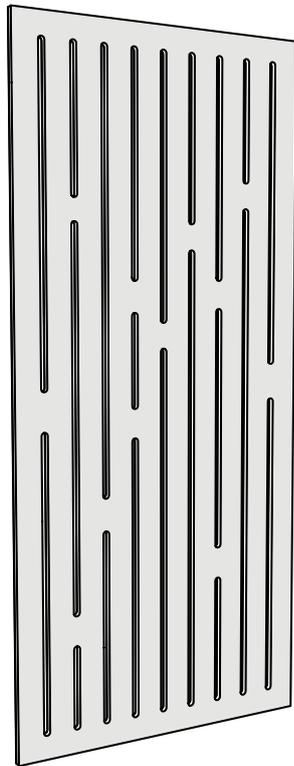


**dECO Screens Lines**  
Thickness: 27mm  
Height: 2400mm or 2700mm

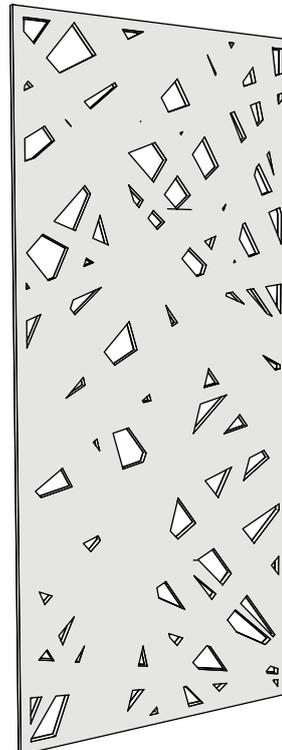


**dECO Screens Fracture**  
Thickness: 27mm  
Height: 2400mm or 2700mm


## Finishes




## Installation Options

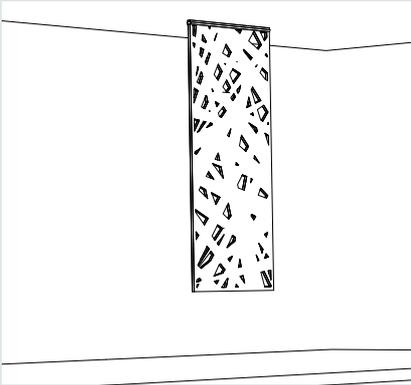

Direct Fixed

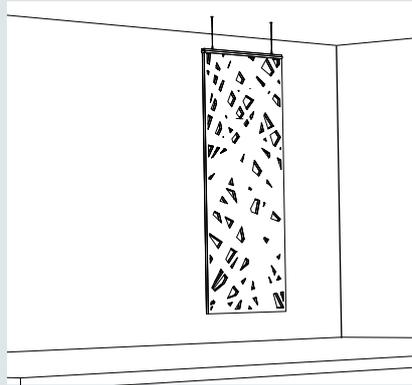

Suspended for  
Ceiling Grid or Soffit

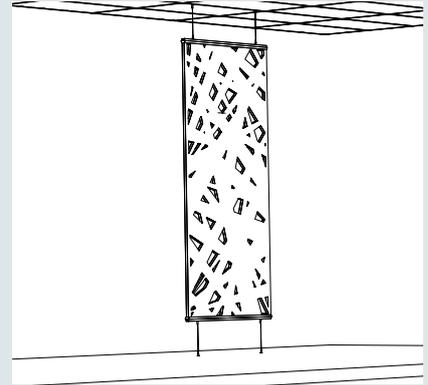

Suspended with Tension  
for Ceiling Grid or Soffit

## Acoustic Performance

| Frequencies  | 125hz | 250hz | 500hz | 1,000hz | 2,000hz | 4,000hz | NRC  |
|--------------|-------|-------|-------|---------|---------|---------|------|
| dECO Screens | 0.03  | 0.19  | 0.58  | 0.87    | 0.96    | 0.97    | 0.65 |

Tested in accordance with AS/ISO 354:2006

Note: Acoustic performance is based on the substrate dECO Deluxe.

## Physical Description and Properties

|                              |  |   |
|------------------------------|--|---|
| <b>Product name:</b>         | dECO Screens   |   |
| <b>Composition blade:</b>    | 100% Polyester Fibre (PET)   |   |
| <b>Decorative finishes:</b>  | dECO Screens are available in dECO Felt colour range with black or white core  |   |
| <b>Channel:</b>              | VERTO™ hanging system<br><br>Verto™ is available in Clear Anodised, Satin Black and Pearl White Gloss. Custom colours also available. Please refer to your CSR Martini representative for more information |   |
| <b>Screen height:</b>        | Available in 2400mm or 2700mm<br>Tolerance: length +/- 10mm; width +/- 5mm   |   |
| <b>Screen thickness:</b>     | 27mm<br>Tolerance: +/- 2mm   |   |
| <b>Installation:</b>         | Refer to VERTO™ Install Instructions for installation guidelines   |   |
| <b>Intended use:</b>         | dECO Screens are suitable for indoor use only. Suitable for ceiling and wall applications. Not suitable for external use   |   |
| <b>Moisture absorption:</b>  | Exposure to an atmosphere of 50°C and 95% RH for four days gives moisture absorption of less than 0.2% by volume   |   |
| <b>Acoustic performance:</b> | Refer to Acoustic Performance section on previous page   |   |
| <b>Fire resistance:</b>      | Tested to AS ISO 9705 Corner Burn in accordance with AS 5637.1   | <b>Group 1</b><br>SMOGRA<br>not more than<br>100m <sup>2</sup> /s <sup>2</sup> x 1000 |
| <b>Seismic</b>               |  |   |

Proudly distributed by

**HIMMEL™**  
SAINT-GOBAIN

# csrmartini.com.au

---

CSR Martini Pty Limited  
P.O. Box 560, Ingleburn NSW 1890  
martinienquiries@csr.com.au  
1300 767 776

---

12/25



Disclaimer: The contents of this brochure are copyright protected and may not be reproduced in any form without prior written consent of CSR Martini. Recommendations and advice regarding the use of the products described in this brochure are to be taken as a guide only, and are given without liability on the part of the company or its employees. We reserve the right to change product specifications without prior notification, please refer to the CSR Martini website for the latest version of this document. The purchaser should independently determine the suitability of the product for the intended use and application.